


SOLIDLINE
Designed by Ledlenser

— PRODUCT DATA SHEET
SL-Pro300

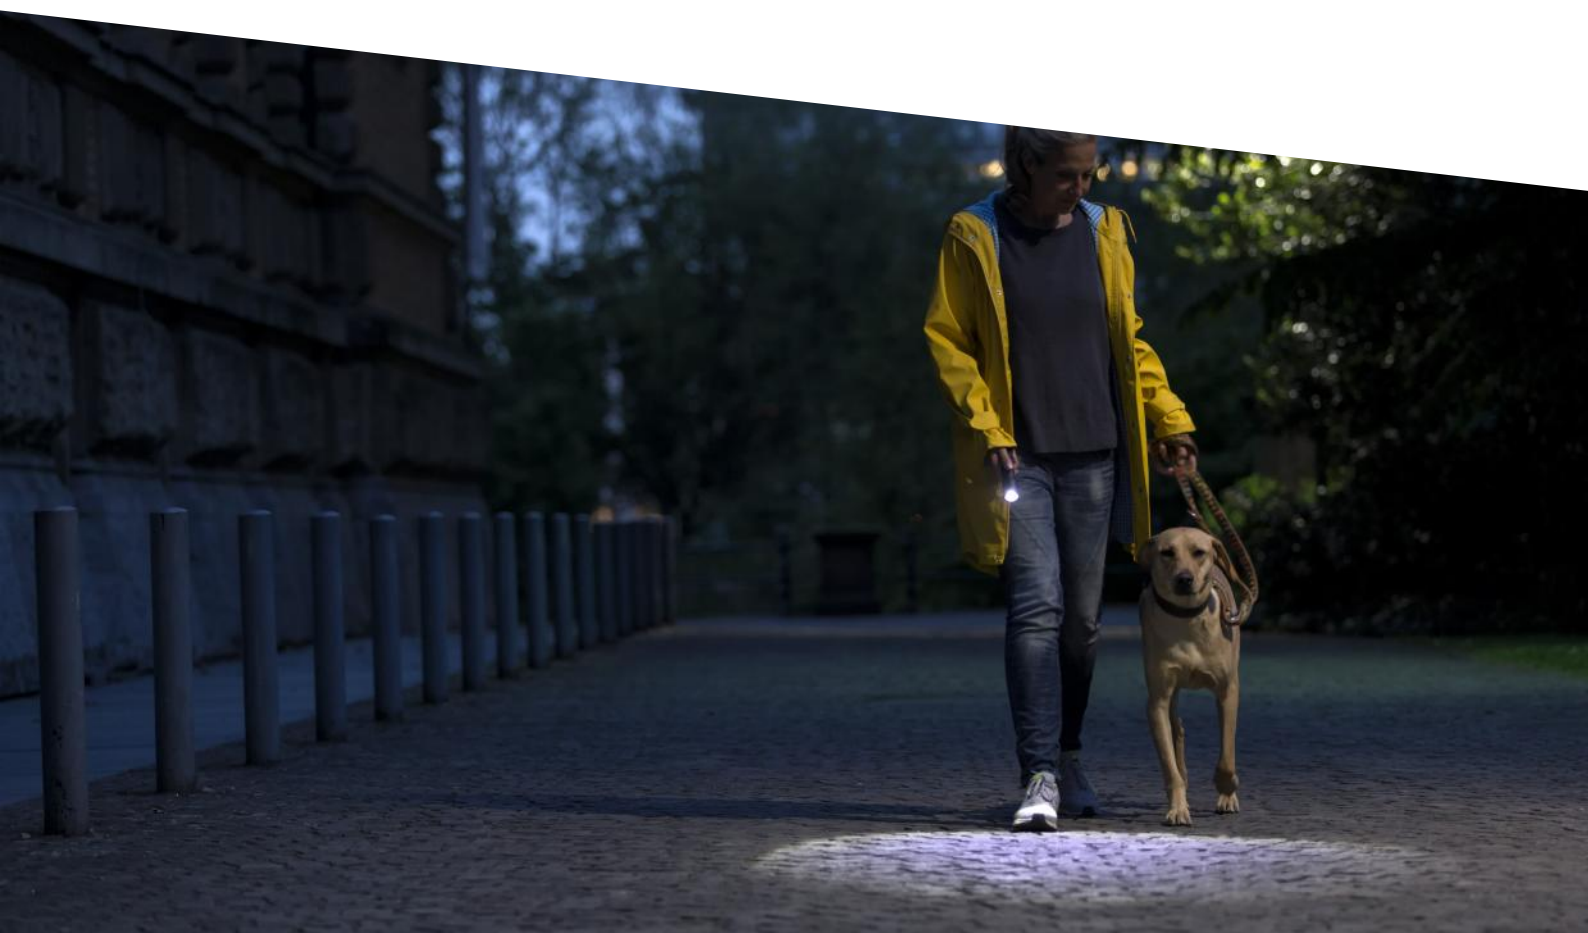

SL-Pro300

PRODUCT DESCRIPTION

The Ledlenser SL Pro300 features three lighting functions that provide optimal light in any situation: 'Low Power' extends the lighting capacity to up to 50 hours¹ of operation, 'Power' allows for a beam distance of 200 meters¹ and 'Boost' amps up the range to a full 250 meters¹. This ultra-strength high-end LED will impress you with its extraordinarily bright beam that can be individually adjusted to suit your needs. The premium aluminium housing – the same used to build aircraft – is especially resilient in the face of hard impacts and heavy rain.

- Powerful performance at an unbeatable price: the powerhouse of the Solidline series
- Flexible versatility thanks to multi-level lighting modes ranging from 'Low Power' to 'Boost'
- Reliable companion providing an unbelievable 50 hours¹ of light
- Air-craft grade aluminium housing protects the light in any situation
- Beam distance of up to 250 meters¹ thanks to high-end LED

TECHNICAL DATA

Length [mm]	184
Head diameter [mm]	44
Tube diameter [mm]	36
Weight incl. batteries [g]	336
Weight without batteries [g]	243
Focus function	No
Head material	Aluminum alloy
Tube material	Aluminum alloy
Optic	Plastic lense (PMMA)
Cartridge	Yes

POWER SUPPLY

Power source type	Battery
Battery quantity	4
Battery type	Alkaline
Rechargeable	No
Energy modes	Energy Saving
Usable batteries	AA NiMH 1.2V

FURTHER SPECIFICATIONS

IP class	IPX4
Drop test (drop height) [m]	1
Working temperature range [°C]	-20 to +40

LIGHT FUNCTIONS

Low Power, Power, Boost

LIGHT SOURCE

Amount LEDs	1
LED type	High Power LED
Color	White
Color temperature [K]	6000 to 8000
Color rendering index (CRI)	70

LEDLENSER VALUES

	Boost	Power	Mid Power	Low Power
Energy Saving				
Light output ¹ [lm]	300	220		40
Beam distance ¹ [m]	250	200		90
Run time ¹ [h]	5	40		50

SWITCH

End Cap Switch

SL-Pro300

PACKAGING AND LOGISTICS



PACKAGING INFORMATION

Type of packaging	Test It Blister
Scope of delivery	1 set of batteries, Hand strap
Item No.	501068
Customs tariff number	85131000000
Color	silver
MSRP price (€)	24.90

SINGLE PACKAGE

Dimensions W x H x D [cm]	15 x 28 x 5.3
Gross weight [g]	464
GTIN-13	4058205008952

INNER CARTON

Unit	12
Dimensions W x D x H [cm]	38 x 28.7 x 32.5
Gross weight [g]	6150
GTIN-13	4058205008969

EXPORT CARTON

Unit	24
Dimensions W x D x H [cm]	61.5 x 41 x 36.5
Gross weight [kg]	13.3
GTIN-13	4058205008976

SL-Pro300

ACCESORIES

PRODUCT CATEGORY	ITEM NUMBER	PRODUCT NAME	MSRP
Battery	500980	4x AA Alkaline Ionic	3.49 €

— SL-Pro300

PRODUCT SERIES

The Solidline-Series

High quality, low prices

Best quality for budget-conscious users of portable light – this is the concept behind the Solidline range designed and engineered by Ledlenser. The Solidline headlamps, flashlights and multi-purpose lights offer outstanding technologies and features to form a comprehensive assortment that is suitable for various purposes. In order to protect the purse even in the use phase, almost all lamps of the series are directly rechargeable versions or can also be operated with rechargeable batteries.

FOOTNOTES

The information pertaining to scope of delivery, appearance, performance, dimensions and weight corresponds to the information available at the time of publication. In the interest of product development, we reserve the right to change scope of delivery, appearance, design and color without prior notice. Product images may vary from the actual products and may show optional accessories which can be purchased separately. Errors and omissions excepted.

1) Measurement values according to ANSI FL1 in the respective setting. If no setting is explicitly indicated, the values refer to luminous flux (lumens/lm) and lighting range (meters/m) on the highest setting, and to battery duration (hours/h) on the lowest setting. A boost function (if available) can be used several times, but only for short periods of time. If the light is equipped with (a) colored LED(s), the measurement values are given for the white light or the white LED. If the light has different energy modes, the measurement is made based on the "energy saving mode".